


3400F: MNPTF X FNPTF 90 DEGREE ELBOW

MATERIAL: FORGED BRASS
 ASTM: B-124
 TYPE: CA-377
 TEMP RANGE: -65° - 250° F



| PART NO. | A NPTF | A1 NPTF | N | N1 | D | D1 | Y | Working Pressure |
|-----------|-----------|------------|------|------|-----|------|------|---------------------|
| 3400F-2 | 1/8-27 | 1/8-27 | .86 | .61 | .22 | .31 | .63 | 2459 |
| 3400F-4 | 1/4-18 | 1/4-18 | 1.22 | .91 | .28 | .40 | .81 | 2113 |
| 3400F-4-6 | 1/4-18 | 3/8-18 | 1.13 | .66 | .31 | .56 | .88 | 2113 |
| 3400F-6-2 | 3/8-18 | 1/8-27 | .91 | .78 | .31 | .31 | .47 | 2700 |
| 3400F-6 | 3/8-18 | 3/8-18 | 1.30 | .94 | .41 | .53 | .94 | 2086 |
| 3400F-6-8 | 3/8-18 | 1/2-14 | 1.38 | .97 | .41 | .69 | 1.00 | 1776 |
| 3400F-8-6 | 1/2-14 | 3/8-18 | 1.36 | .97 | .50 | .50 | 1.00 | 1980 |
| 3400F-8 | 1/2-14 | 1/2-14 | 1.44 | .97 | .56 | .69 | 1.00 | 1708 |
| 3400F-12 | 3/4-14 | 3/4-14 | 1.73 | 1.34 | .72 | .89 | 1.38 | 1674 |
| 3400F-16 | 1-11.5 | 1-11.5 | 2.11 | 1.59 | .91 | 1.13 | 1.75 | 1680 |

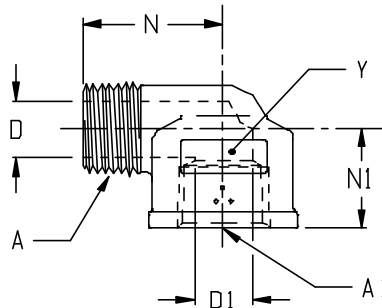