


**FF: HOSE BARB X FNPT**

MATERIAL: BRASS  
 ASTM: B-16  
 TYPE: CA-360  
 TEMP RANGE: -65° - 250° F



PART NO	HOSE I.D.	A NPT	C	L	BARB LENGTH	D	TAP DRILL	Working Pressure
FF32	3/16	1/8-27	.500	1.32	.7687	.127	.338	1200 psi
FF34	3/16	1/4-18	.625	1.53	.97			1200 psi
FF42	1/4	1/8-27	.500	1.45	.97	.186	.338	1200 psi
FF44	1/4	1/4-18	.626	1.61	.97	.186	.440	1200 psi
FF46	1/4	3/8-18	.750	1.61	.97	.186	.580	1200 psi
FF54	5/16	1/4-18	.625	1.61	.97	.223	.436	1200 psi
FF62	3/8	1/8-27	.563	1.53	.97	.281	.338	1200 psi
FF64	3/8	1/4-18	.626	1.61	.97	.281	.438	1200 psi
FF66	3/8	3/8-18	.752	1.63	.97	.286	.570	1200 psi
FF68	3/8	1/2-14	.937	1.77	.97	.286	.660	1200 psi
FF84	1/2	1/4-18	.628	1.61	.97	0.30	0.30	1200 psi
FF86	1/2	3/8-18	.752	1.63	.97	0.39	0.39	1200 psi
FF88	1/2	1/2-14	.937	1.77	.97	0.66	0.66	1200 psi
FF1212	3/4	3/4-14	1.187	1.99	1.19	.800	.910	1200 psi

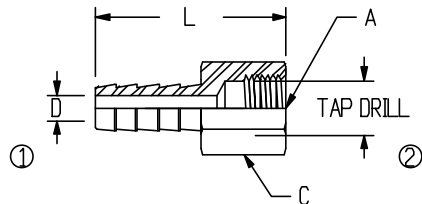