


FMB: MJIC X FNPTF ADAPTER

MATERIAL: BRASS
 ASTM: B-16
 TYPE: CA-360
 TEMP RANGE: -65° - 250° F



PART NO	TUBE OD	B UN/UNF-2A	A NPTF	L	C	D	TAP DRILL	Working Pressure
FMB42	1/4	7/16-20	1/8-27	1.19	0.56	0.17	0.36	3250 psi
FMB44	1/4	7/16-20	1/4-18	1.40	0.75	0.17	0.36	3250 psi
FMB64	3/8	9/16-18	1/4-18	1.40	0.75	0.30	0.48	32580 psi
FMB66	3/8	9/16-18	3/8-18	1.40	0.88	0.30	0.48	3250 psi
FMB86	1/2	3/4-16	3/8-18	1.56	0.88	0.39	0.65	3250 psi
FMB88	1/2	3/4-16	1/2-14	1.66	1.13	0.39	0.65	3250 psi
FMB108	5/8	7/8-14	1/2-14	1.87	1.13	0.48	0.77	3250 psi
FMB1212	3/4	1 1/16-12	3/4-14	2.06	1.38	0.61	0.94	2600 psi
FMB1616	1	1 5/16-12	1-11 1/2	2.35	1.63	0.84	1.17	1950 psi

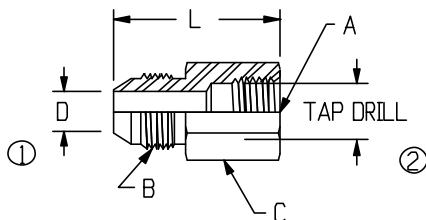