


PLM: PUSH-ON HOSE BARB X MNPT

MATERIAL: BRASS
 ASTM: B-16
 TYPE: CA-360
 TEMP RANGE: -40° - 200° F



PART NO	HOSE I.D.	A NPT	L	BARB LENGTH	C	D1	D2	Working Pressure
PLM42	1/4	1/8-27	1.43	.87	.50	.177	.216	300 psi
PLM44	1/4	7/16-20	1.66	.87	.56	.177	.343	300 psi
PLM46	1/4	3/8-18	1.66	.87	.69	.177	.469	300 psi
PLM54	5/16	1/4-18	1.66	.87	.56	.228	.343	300 psi
PLM62	3/8	1/8-27	1.53	.97	.50	.265	.265	300 psi
PLM64	3/8	1/4-18	1.76	.97	.56	.281	.343	300 psi
PLM66	3/8	3/8-18	1.76	.97	.68	.281	.469	300 psi
PLM68	3/8	1/2-14	1.97	.97	.87	.281	.562	300 psi
PLM84	1/2	1/4-18	1.76	.97	.68	.346	.346	300 psi
PLM86	1/2	3/8-18	1.76	.97	.68	.406	.469	300 psi
PLM88	1/2	1/2-14	1.97	.97	.87	.406	.562	300 psi
PLM812	1/2	3/4-14	1.97	.97	1.06	.406	.750	300 psi
PLM108	5/8	1/2-14	2.45	1.45	.87	.532	.562	300 psi
PLM1012	5/8	3/4-14	2.45	1.45	1.06	.532	.750	300 psi
PLM128	3/4	1/2-14	2.45	1.45	.87	.562	.562	300 psi
PLM1212	3/4	3/4-14	2.45	1.45	1.06	.656	.750	300 psi

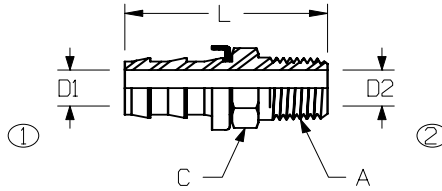