


**PLS: PUSH-ON HOSE BARB X FJIC SWIVEL**

MATERIAL: BRASS  
 ASTM: B-16  
 TYPE: CA-360  
 TEMP RANGE: -40° - 200° F



PART NO	HOSE I.D.	B UN/UNF-2B	L	C	D1	D2	Working Pressure
PLS44	1/4	7/16-20	1.51	0.56	.17	.17	300 psi
PLS45	1/4	1/2-20	1.552	.626	.175	.175	300 psi
PLS46	1/4	9/16-18	1.538	.689	.175	.175	300 psi
PLS66	3/8	9/16-18	1.70	0.69	.293	.293	300 psi
PLS68	3/8	3/4-16	1.740	.877	.278	.278	300 psi
PLS86	1/2	9/16-18	1.87	.685	.294	.294	300 psi
PLS88	1/2	3/4-16	1.87	0.87	0.38	0.38	300 psi
PLS810	1/2	7/8-14	1.842	1.00	.403	.403	300 psi
PLS108	5/8	3/4-16	2.501	.875	.390	.390	300 psi
PLS1010	5/8	7/8-14	2.299	.999	.529	.529	300 psi
PLS1212	3/4	1 1/16-12	2.48	1.25	0.65	0.65	300 psi
PLS1616	1	1 5/16-12	2.75	1.52	0.80	0.80	300 psi

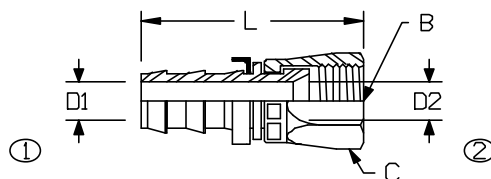