


SBC: MJIC X MNPTF CONNECTOR

MATERIAL: BRASS
 ASTM: B-16
 TYPE: CA-360
 TEMP RANGE: -65° - 250°F



PART NO	TUBE OD	A NPTF	B UN/UNF-2A	L	C	D1	D2	Working Pressure
SBC42	1/4	1/8-27	7/16-20	1.22	0.50	0.17	0.19	3250 psi
SBC44	1/4	1/4-18	7/16-20	1.42	0.56	0.17	0.28	3250 psi
SBC46	1/4	3/8-18	7/16-20	1.42	0.75	0.17	0.41	3250 psi
SBC54	5/16	1/4-18	1/2-20	1.42	0.56	0.23	0.28	3250 psi
SBC62	3/8	1/8-27	9/16-18	1.24	0.63	0.30	0.19	3250 psi
SBC64	3/8	1/4-18	9/16-18	1.43	0.63	0.30	0.28	3250 psi
SBC66	3/8	3/8-18	9/16-18	1.43	0.75	0.30	0.41	3250 psi
SBC68	3/8	1/2-14	9/16-18	1.69	0.88	0.30	0.53	3250 psi
SBC84	1/2	1/4-18	3/4-16	1.53	0.81	0.39	0.28	3250 psi
SBC86	1/2	3/8-18	3/4-16	1.53	0.81	0.39	0.41	3250 psi
SBC88	1/2	1/2-14	3/4-16	1.79	0.88	0.39	0.53	3250 psi
SBC812	1/2	3/4-14	3/4-16	1.85	1.13	0.39	0.72	2600 psi
SBC108	5/8	1/2-14	7/8-14	1.89	0.94	0.48	0.53	3250 psi
SBC1012	5/8	3/4-14	7/8-14	1.95	1.13	0.48	0.72	2600 psi
SBC128	3/4	1/2-14	1 1/16-12	2.06	1.13	0.61	0.53	2925 psi
SBC1212	3/4	3/4-14	1 1/16-12	2.06	1.13	0.61	0.72	2600 psi
SBC1216	3/4	1-11 1/2	1 1/16-12	2.25	1.38	0.61	0.94	1950 psi
SBC1612	1	3/4-14	1 5/16-12	2.11	1.38	0.84	0.72	2275 psi
SBC1616	1	1-11 1/2	1 5/16-12	2.30	1.38	0.84	0.94	1950 psi
SBC2020	1 1/4	1 1/4-11 1/2	1 5/8-12	2.45	1.69	1.08	1.25	1625 psi

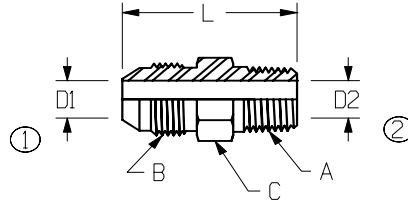